(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 24 March 2005 (24.03.2005)

PCT

(10) International Publication Number WO 2005/026597 A1

(51) International Patent Classification7: 31/70, G05D 23/02, F24H 9/20

F16K 17/38,

(21) International Application Number:

PCT/AU2004/001274

(22) International Filing Date:

17 September 2004 (17.09.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2003905087

18 September 2003 (18.09.2003)


- (71) Applicant (for all designated States except US): GSA IN-DUSTRIES (AUST.) PTY LTD [AU/AU]; Level 54, Rialto, 525 Collins Street, Melbourne, VIC 3000 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CUNNINGHAM, Aaron, Christian [AU/AU]; 46 Scenic Road, Kenmore, QLD 4069 (AU).
- (74) Agent: PHILLIPS ORMONDE & FITZPATRICK; 367

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the begin-

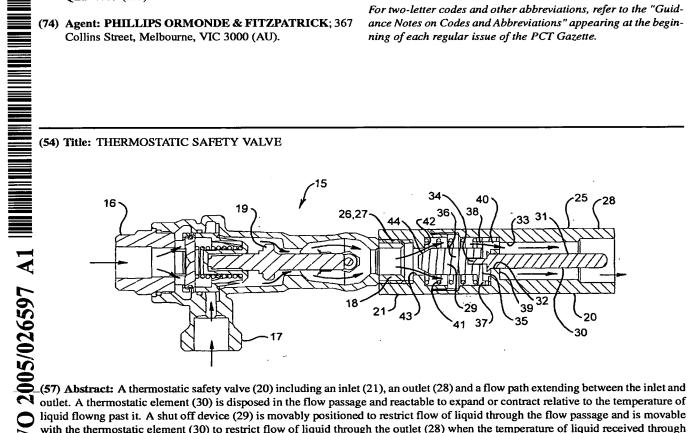

liquid flowng past it. A shut off device (29) is movably positioned to restrict flow of liquid through the flow passage and is movable with the thermostatic element (30) to restrict flow of liquid through the outlet (28) when the temperature of liquid received through the inlet (21) exceeds a predetermined temperature.